

VETROSPACE



XXL

PRODUCT CARD | 2025

XXL

| TECHNICAL SPECIFICATION               |                                                                                   |                                                                   |
|---------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------|
| External dimensions (WxDxH)*          | 410×310×240cm                                                                     |                                                                   |
| Internal dimensions (WxDxH)*          | 400×300×220cm                                                                     |                                                                   |
| Indoor area                           | 12m²                                                                              |                                                                   |
| Weight                                | 1950kg                                                                            |                                                                   |
| Required free height for installation | 250cm                                                                             |                                                                   |
| Soundproofing                         | Class A<br>(ISO 23351-1)                                                          | 41-46dB Rw<br>(ISO 717)                                           |
| Glass                                 | 16mm Sound Control laminated safety glass                                         |                                                                   |
| Door                                  | Dual panel sliding door, wheelchair access                                        |                                                                   |
| Door handing                          | Left or right hand                                                                |                                                                   |
| Ventilation                           | Automatic +180l/s                                                                 |                                                                   |
| Ventilation control                   | Smart CO2 controller                                                              |                                                                   |
| Ventilation fan                       | Radial fan, heavy duty                                                            |                                                                   |
| Air filtration:                       | AIR SPEC:                                                                         | CLEAN SPEC:                                                       |
|                                       | G4                                                                                | G4 + & HEPA H 13 (ISO-7 level IAQ)                                |
| Lighting:                             | Dimmable LED 4000K, motion detector                                               | Antimicrobial Spectral Blue + Dimmable LED 4000K, motion detector |
| Usage                                 | Continuous, 24/7                                                                  |                                                                   |
| Connectivity                          | 4 pcs power socket, USB A+C (charging), 2 pcs RJ45                                |                                                                   |
| Power supply                          | 110-240 VAC / 10-16A / 50-60Hz                                                    |                                                                   |
| Power and network cable               | 5 meters                                                                          |                                                                   |
| Power                                 | 150W (avg) 800W (peak)                                                            |                                                                   |
| Fire safety                           | UL 723: Class A-C (surface)<br>ASTM E648: Class 1 (flooring)<br>Bfl-S1 (flooring) |                                                                   |
| Electrical safety                     | EN-IEC 60335-1:2024<br>UL 962 (E514776)                                           |                                                                   |

(\*) May vary a few centimeters, depending on the selected stucture and door(s) locacation. Ask our sales team for customized sizes, heights, and door solutions

| OPTIONS                                                                   |
|---------------------------------------------------------------------------|
| AV kit in technology panel (includes HDMI/USB A DATA/POWER/VESA BRACKET)  |
| AV kit in separate AV panel (includes HDMI/USB A DATA/POWER/VESA BRACKET) |
| Air conditioning                                                          |
| Additional sliding door                                                   |
| Electromagnetic lock (can be connected to 3rd party systems)              |
| Door ramp pair (threshold without ramp is only 15mm)                      |
| Additional acoustic panels with velcro fixing                             |
| Sprinkler opening                                                         |
| Privacy glass (electric dimming with remote controller)                   |

| PACKAGING |                     |
|-----------|---------------------|
| Crate #1  | 249×77×134cm 1000Kg |
| Crate #2  | 249×77×124cm 800Kg  |
| Crate #3  | 323×77×94cm 350Kg   |
| Crate #4  | 323×77×94cm 350Kg   |
| Crate #5  | 323×77×94cm 350Kg   |
| Crate #6  | 423×23×23cm 30Kg    |

| STRUCTURE OPTIONS |    |    |    |    |       |
|-------------------|----|----|----|----|-------|
| #1                | #2 | #3 | #4 | #5 | #5CS* |

In the standard pod, the door can be placed on any element on the front wall and can be left or right handed. Ask our sales team if you interested in a pod with a door on side wall.

(\*) #5CS is a dual door customer service pod that comes with added cost.




## Standard range


ECOfelt  
90% wool, 10 recycled PET  
Interior | Walls and ceiling  
[www.slalom-it.com](http://www.slalom-it.com)



ECOfelt 955  
Ghost white



ECOfelt 953  
Grey



ECOfelt 923  
Dark grey




ECOfelt 332E  
Caramel




ECOfelt 952  
Beige

Aluminium  
Interior & Exterior | Profiles  
[makelaalu.fi](http://makelaalu.fi)




RAL 9016  
White




RAL 9004  
Black



RAL 5004  
Black Blue




RAL 7006  
Beige Grey




RAL 080 90 10  
Mushroom white

Koskisen MFC  
Exterior | Wall panels  
[koskisen.com](http://koskisen.com)



Basic White



U999 TM9  
Black



U599  
Indigo Blue



H1399 ST10  
Truffle Brown Denver Oak




H3157 ST12  
Vicenza Oak



U115 ST9  
Carat Beige

Tapibel Cobalt SDN  
100% polyamide  
Interior | carpet  
[Tapibel.be](http://Tapibel.be)



64041  
Light Grey



64051  
Dark grey



64010  
Light Beige




64031  
Dark Beige

Rooftop is always white (visible only from bird's eye perspective).



## Extended range

EGGER MFC  
Exterior | Wall panels  
egger.com



H1227 TM12  
Brown Abano Ash




U640 ST9  
Olive Green



U325 ST9  
Antique Rose

Aluminium  
Interior & Exterior | Profiles  
makelaalu.fi



RAL 070 30 10  
Dark Brown




RAL 100 60 20  
Olive Green




NCS S3010-Y80R  
Rose


Tapibel Cobalt SDN  
100% polyamide  
Interior | carpet  
Tapibel.be



64020  
Beige



64044  
Mid Grey





64061  
Grey Blue

## Custom range

| MATERIAL                                 | APPLICATION                          | MORE INFO     |
|------------------------------------------|--------------------------------------|---------------|
| Slalom Acoustics ECOfelt                 | Interior or exterior walls / Ceiling | slalom-it.com |
| Egger eurodecor MFC or HPL               | Exterior walls                       | egger.com     |
| HVL Real wood veneer                     | Exterior walls                       | hvloy.com     |
| RAL Classic / Design                     | Profiles                             | ral-farben.de |
| Tapibel Cobalt SDN                       | Carpet                               | tapibel.be    |
| Gerflor GTI Tiles / Mipolam Affinity EL7 | Flooring                             | gerflor.com   |

Contact our sales team for other options.

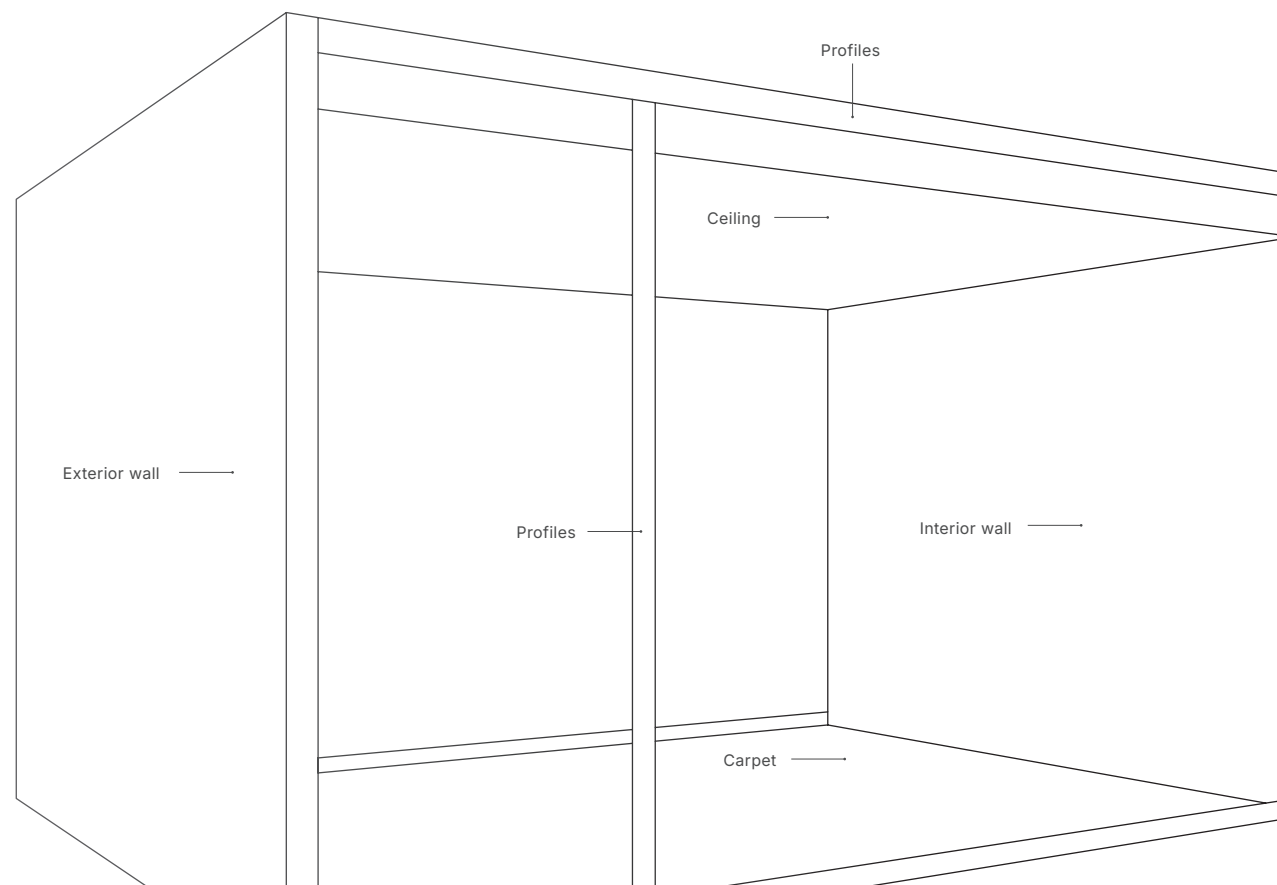

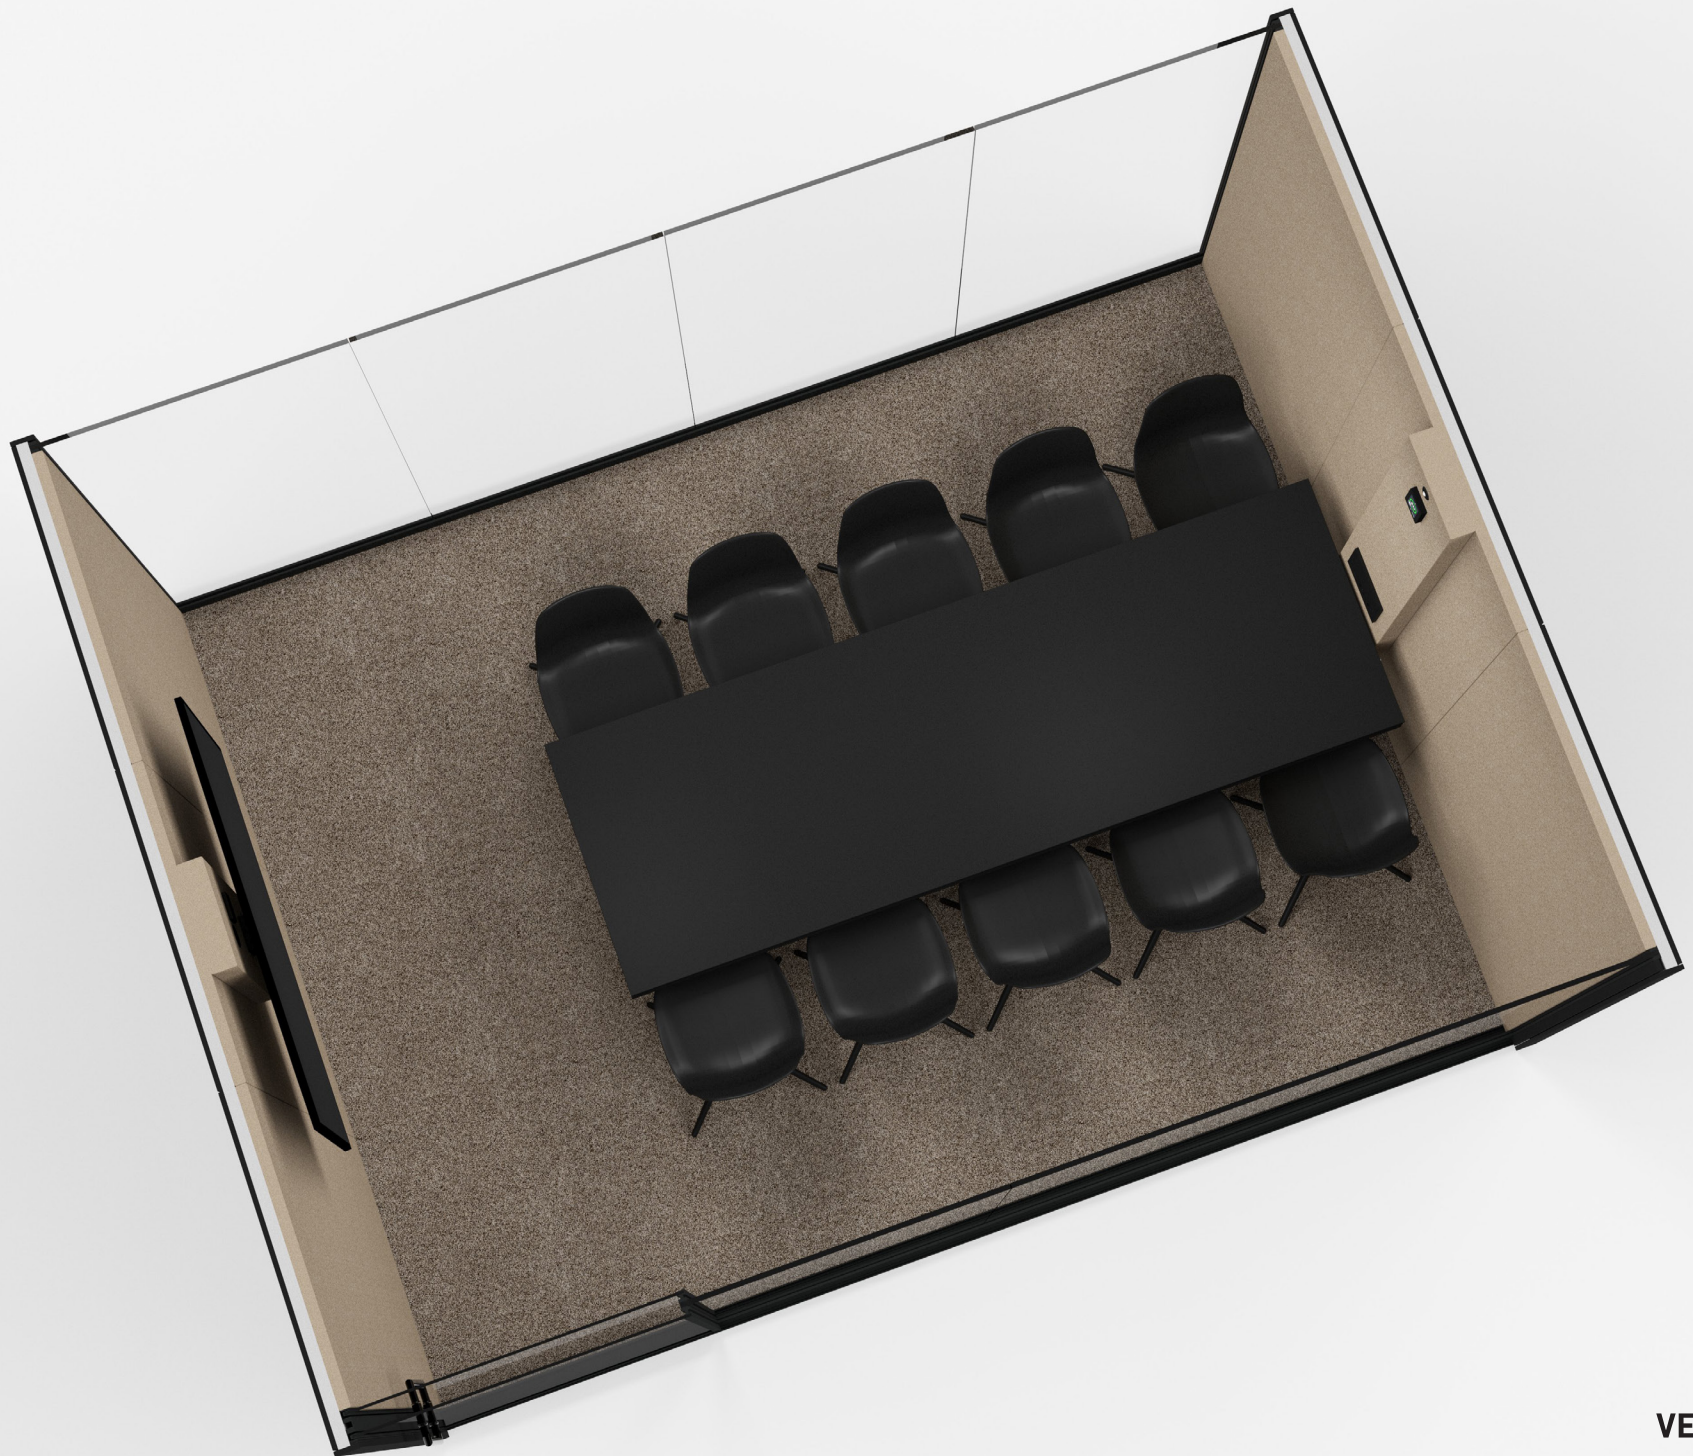

# The anywhere workspace.

POD FLEXIBILITY WITH ROOM PERFORMANCE



Patent pending.  
[vetrospace.com/legal](https://vetrospace.com/legal)



Vetrospace Ltd, manufactured in Finland and available in the UK through Gibbsonn Ltd

#### HQ

Units H5 & H6  
Peek Business Park,  
Woodside Industrial Estate,  
Bishop's Stortford  
Herts CM23 5RG

#### Showroom

Units H5 & H6  
Peek Business Park,  
Woodside Industrial Estate,  
Bishop's Stortford  
Herts CM23 5RG

#### Contact:

+44 01279 757575  
[info@gibbsonn.com](mailto:info@gibbsonn.com)  
[www.gibbsonn.com](https://www.gibbsonn.com)

**VETRO**  **SPACE**